
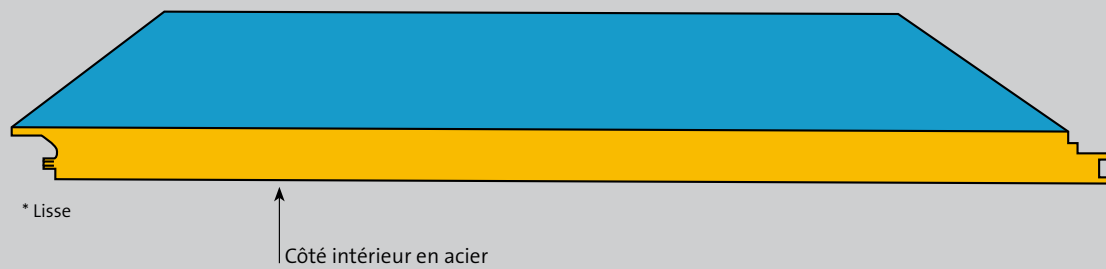
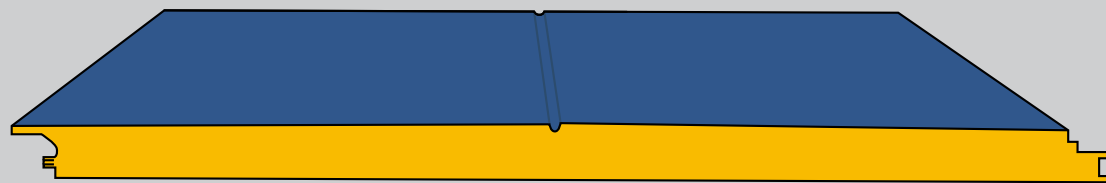


Caractéristiques ▷

Module ▷

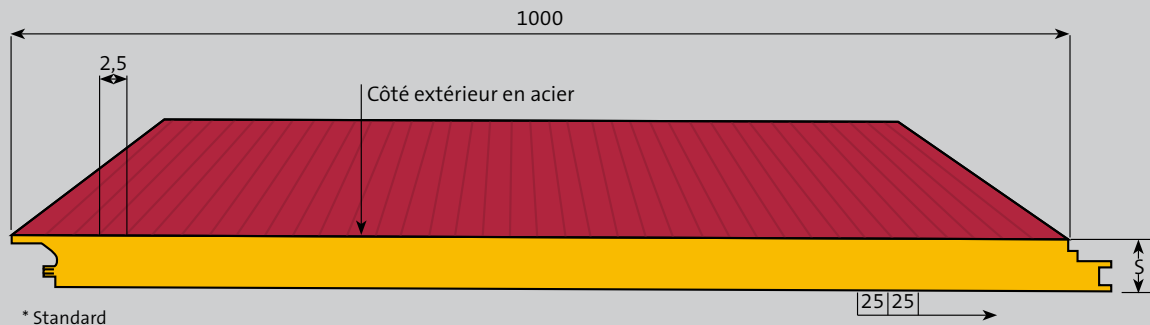

Acier - acier ▷

S mm	K		Poids Panneau kg/m ²	P											
				P					P						
	Kcal m ² h °C	Watt m ² °C		0,5+0,5	Δ	l	Δ	l	Δ	l	Δ	Δ	l	Δ	l
Standard	40	0,43	0,50	9,96	l =	3,55	3,35	3,15	2,90	2,60	3,25	3,00	2,80	2,60	2,30
	50	0,35	0,41	10,34	l =	4,05	3,80	3,55	3,25	2,85	3,60	3,35	3,05	2,85	2,50
	60	0,29	0,34	10,72	l =	4,50	4,15	3,80	3,50	3,05	3,95	3,70	3,45	3,15	2,70
	70	0,25	0,29	11,10	l =	4,90	4,45	4,05	3,70	3,20	4,30	3,90	3,65	3,30	2,85
	80	0,22	0,26	11,48	l =	5,30	4,75	4,30	3,95	3,40	4,70	4,15	3,85	3,50	3,00
Non Standard	100	0,18	0,21	12,29	l =	5,90	5,25	4,85	4,40	3,75	5,10	4,65	4,30	3,90	3,35
	120	0,15	0,18	13,05	l =	6,50	5,80	5,35	4,85	4,10	5,75	5,10	4,70	4,30	3,65